

MACARTHUR HWY MacArthur Bridge to Howett St

August 29, 2025

Andrea Klopfenstein, P.E.
City Engineer



Project Team

- **City Council Member,
District 1 Denise Jackson**
- Andrea Klopfenstein,
Deputy Director/City
Engineer
- Mandy Mooberry,
Construction Program
Manager
- TERRA Engineering – Design
Engineer
- William Charles- Contractor
Rodney Stum - Superintendent
- Millennia Professional Services -
Construction Engineer
Jeff Garrison– Resident
Engineer


Project Location



MacArthur Ave
From MacArthur Bridge
To Howett St

Typical Section

- Ten-foot-wide drive lanes
- Eleven-foot-wide bidirectional center turn lane
- Eight-foot-wide parking lane
- Ten-foot-wide shared use path
- Five-foot-sidewalk

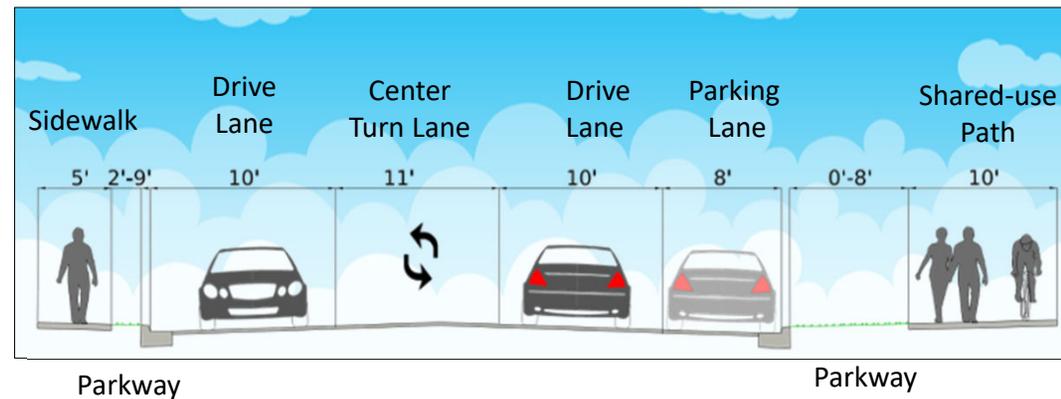

Proposed Improvements

- Pavement & curb and gutter
- Storm sewers & inlets
- Sidewalks & sidewalk ramps
- Traffic signals at MacArthur &
 - Howett
 - McBean
 - John H Gwynn Jr




Schedule

- Start September 2025
- Finish Spring 2027
- Some work may be done during the winter months
- Three construction stages with two or three phases within each stage




Construction Stages

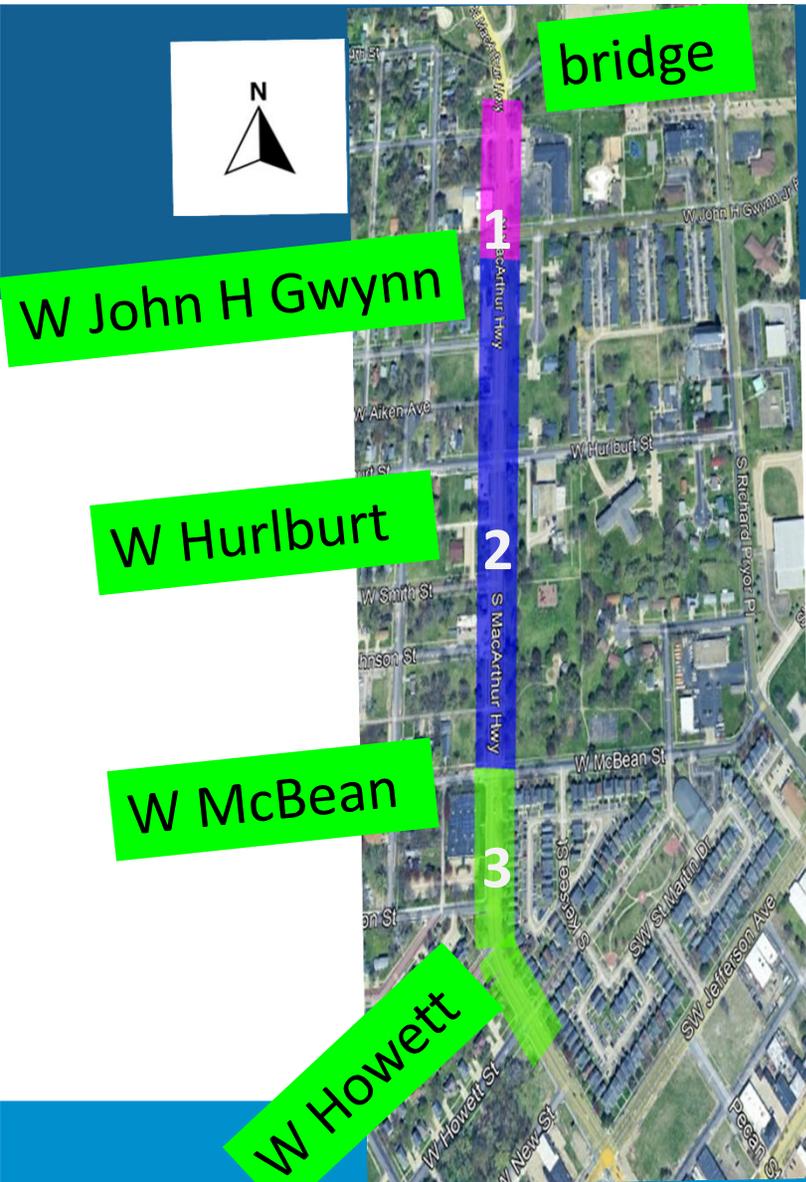

- Stage 1 (purple) Gwynn to bridge
- Stage 2 (blue) McBean to Gwynn
- Stage 3 (green) Howett to McBean

Construction Stage 1

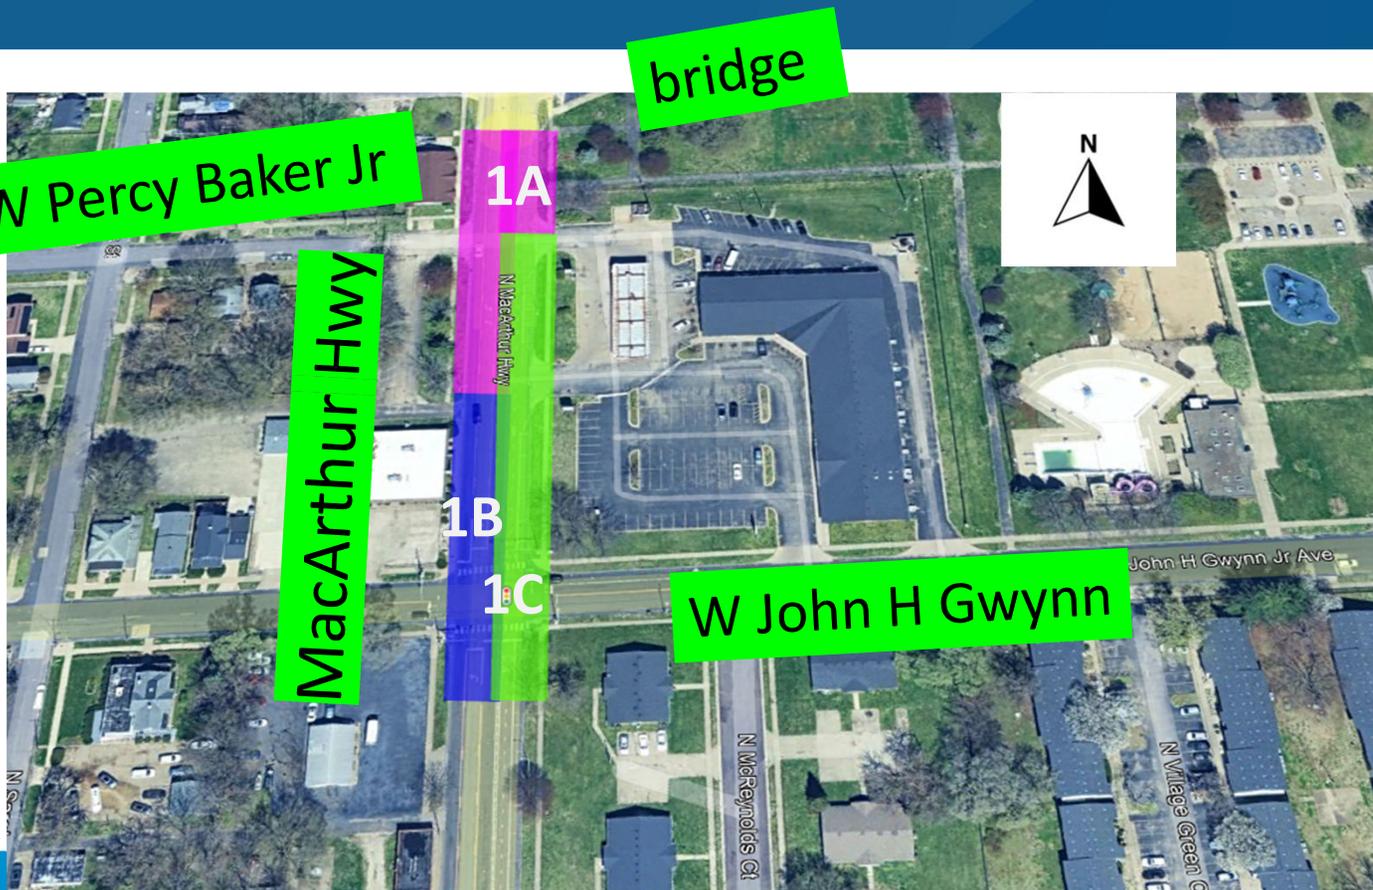


Stage 1A- purple
Stage 1B- blue
Stage 1C- green

September 2025
through
Winter 2025

Stage 1A Maintenance of Traffic


Martin Luther King

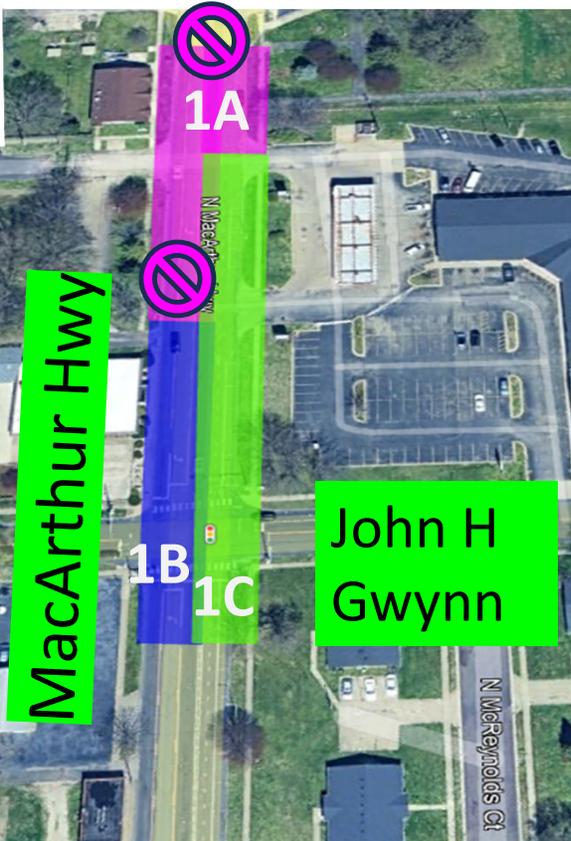


- Stage 1A (purple)
- MacArthur **CLOSED** from John H Gwynn to Martin Luther King
- Business access via MacArthur south of John H Gwynn

Stage 1B & 1C Maintenance of Traffic

Martin Luther King

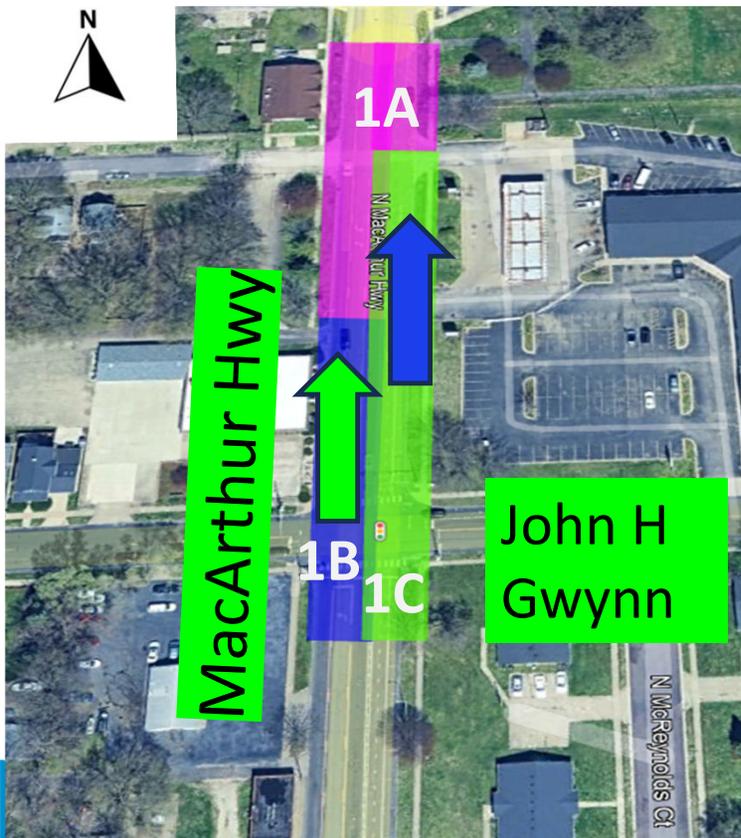


- Stage 1B (blue) work on west side
- Stage 1C (green) work on the east side
- Northbound traffic only from John Gwynn to Martin Luther King
- Business access via MacArthur South of Gwynn

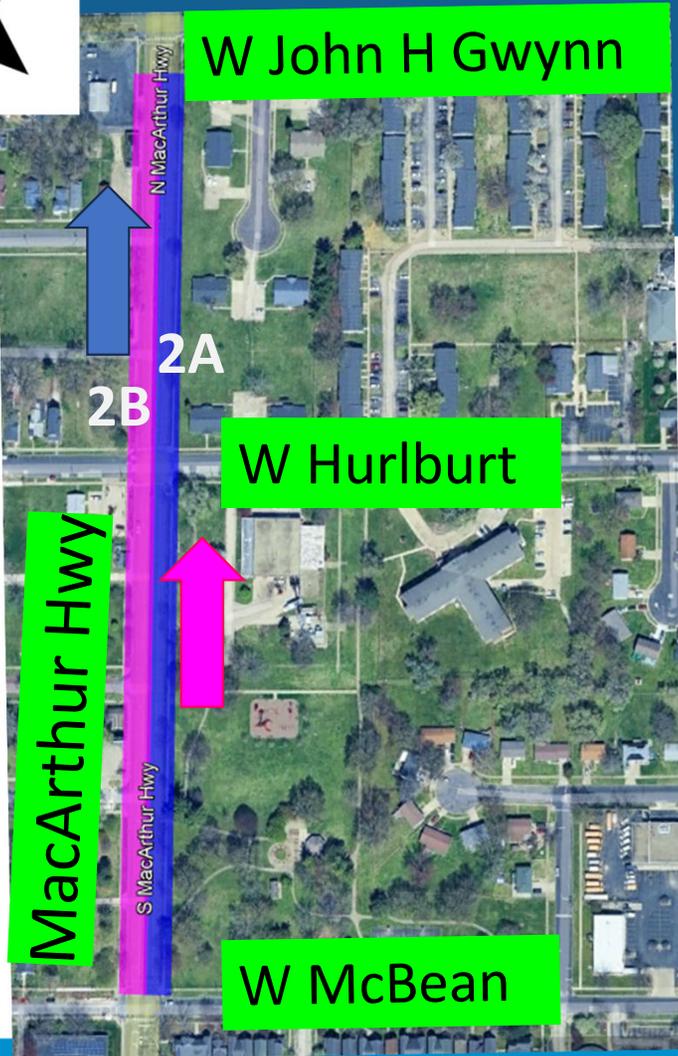

Stage 2 Maintenance of Traffic

- Stage 2A (blue) work on east side
- Stage 2B (purple) work on west side
- Northbound traffic only from McBean to John H Gwynn
- Winter 2025 – Summer 2026

Stage 3 Maintenance of Traffic

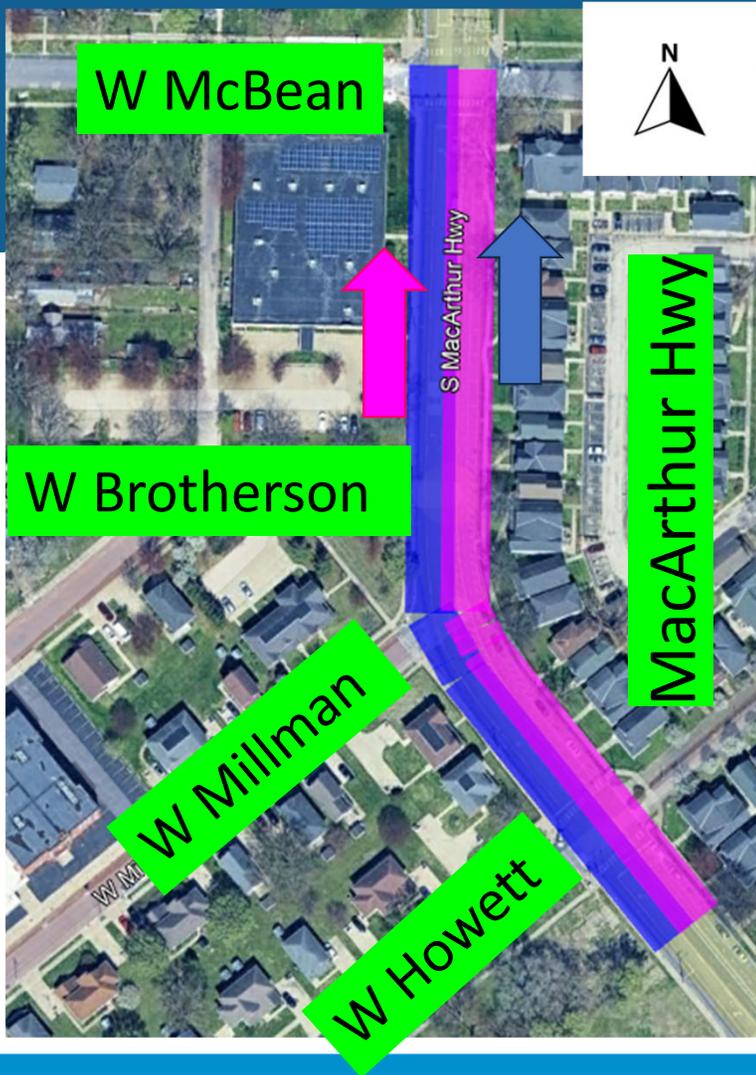

- Stage 3A (blue) work on west side
- Stage 3B (purple) work on east side
- Northbound traffic only from Howett to McBean
- Summer 2026 – Spring 2027

Utility Coordination

This project was coordinated with utility companies:

1. Ameren Gas
2. Ameren Electric
3. Illinois American Water
4. Greater Peoria Sanitary District
5. Telecommunication Companies

Utility work may occur outside of the road project construction stage.

Items in the Right of Way (ROW)

- Remove items out of the ROW to prevent them from being damaged during the project.
- If they are damaged, it's the item owner's responsibility to have them repaired.
- If you need help locating your property/ROW line, contact Jeff.




Items in the Right of Way (ROW)

- **Irrigation Systems-** contact your irrigation company to turn off and relocate the lines in conflict.
- **Invisible Dog Fence-** remove and relocate the lines in conflict.
- **Sump pump and downspout drains-** please let us know where they are located.
- **Landscaping-** remove and relocate anything you want to keep that conflicts with the project.



Common Issues

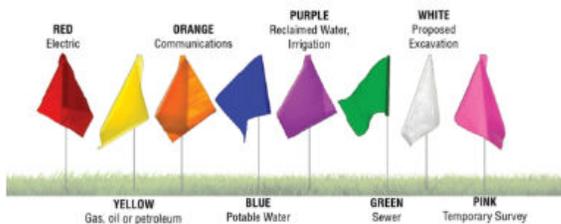

- **Extra work** - If you want extra work on your property, please talk to the contractor directly.
- **Special Access Accommodations** - Please contact Jeff.
- **Business Access** - At least one driveway will be maintained during construction.
- **J.U.L.I.E flags**- Utility markings and flags are used to identify underground utilities.

www.illinois1call.com

Common Issues

- **Delivery of large items**-If you are having a delivery of large items please talk to Jeff
- **Traffic**- It will be chaos for at least 2 weeks as drivers adjust to the new traffic pattern.
- Please be patient.



Common Issues

- **Private landscape companies-** must drop off their equipment and park elsewhere. Vehicles cannot park in the street or construction area.
- **Landscaping-** areas will be disturbed and look rough until the stage is completed.
- **Blowing grass clipping** into the construction area or onto the finished pavement is not allowed.



Communication

- **Jeff Garrison** is the main contact during construction:
jgarrison@millennia.pro
309-370-6169
- The workers in the field know their task but might not know the big picture.



Neighborhood

- Please share neighborhood event information with the Jeff.
- Please share project information with your neighbors.



Project Investment

Storm Water Utility:	\$2,410,000
Local Motor Fuel Tax:	\$1,530,000
DCEO Grant:	\$7,000,000
IL American Water:	\$990,000
Capital:	\$400,000
Total Project Budget:	\$12,330,000



DCEO= Department of Commerce and Economic Opportunity

For More Information

- **Jeff Garrison, Resident Engineer**
 - E-mail: jgarrison@millennia.pro Phone: 309.370.6169
- **Mandy Mooberry, Construction Program Manager**
 - E-mail: mmooberry@peoriagov.org Phone: 309.494.8824
- **Rodney Stum, William Charles Project Superintendent**
 - E-mail: Rodney.Stum@williamcharles.com Phone: 815.997.3713
- **Andrea Klopfenstein, Deputy Director/City Engineer**
 - E-mail: aklopfenstein@peoriagov.org Phone: 309.494.8800



THANK
YOU